
H293

'TRI-CLOVER C-SERIES SANITARY SEALS'
SPECIFICATION SHEET



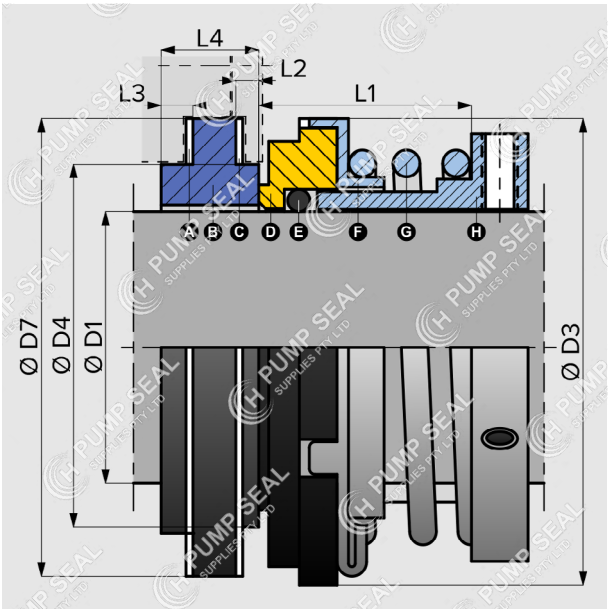

- **Suits Tri-Clover C-Series**
- **Suits Alfa Laval C-Series**
- **Suits Waukesha (SPX) C-Series**
- **Suits Ampco AC / AC+ Series**

H293 replaces the mechanical shaft seal found in C-Series sanitary centrifugal pumps, available in configurations:

- **Type D - External Balanced**

  Externally mounted, rotary only, designed to be run directly against the S.S. pump housing or backing plate.

  Suitable for multi-purpose use

- **Type DG - Clamped-In Seat**

  Complete seal with hard-faced seat (SiC, CER or TC)

  Suitable for maximum corrosion resistance in pure water applications.

- **Type E - Double Seal**

  Uses parts from the Type D to contain a pressurised coolant or sealant.

  Suitable for slurries, tacky products and heavy-duty applications

- **Type F - Flushed Seal**

  Uses parts from the Type D to contain a low-pressure water cascading attachment.

  Suitable for tacky, hot products and vacuum applications

- **Materials**

Rotary Face:	CAB
Stationary Face:	SiC
Gasket:	PTFE
Metal Parts:	Stainless Steel

PARTS

A PTFE Gasket
B Stationary Face
C PTFE Gasket
D Rotary Face
E Rotary O-ring
F Thrust Washer
G Spring
H Collar (optional)

EQUIVALENT

Type 293

AC Seal Kit #3
KIT#3-C114-
KIT#3-C216-
KIT#3-C218-
KIT#3-C4410-

PUMP COMPATIBILITY & SHAFT SIZE

Suits Original Tri-Clover C-Series pumps:

C Series - Close Coupled:
C114, C216, C218, C328, C4410
SP Series - Base-Mounted:
SP114, SP216, SP218, SP328, SP4410
CL Series - Custom-built "Complete Line" Range
CS Series - Variants with S.S. motor shroud
EH Series - Pedestal mounted

Suits Waukesha (SPXFlow) C-Series pumps:
C100, C114, C216, C218, C328

Suits Ampco AC & AC+ Series pumps:
AC114, AC214, AC216, AC218, AC316, AC318, AC328, AC428
AC+114, AC+214, AC+216, AC+218, AC+316, AC+318, AC+328, AC+428, AC+4410, AC+6410

© 2025 Pump Seal Supplies Pty Ltd